




NTPT NTK BEARINGS CO.,LTD.

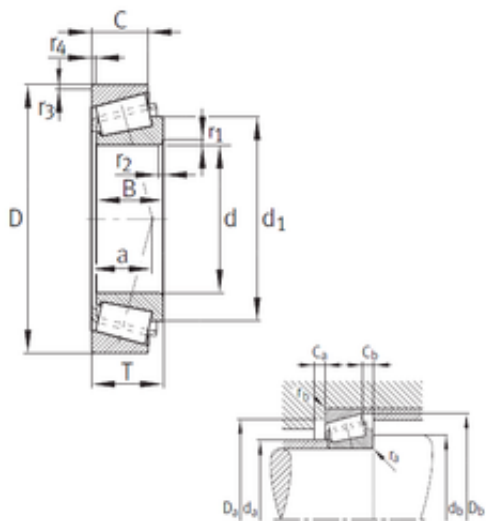

320 mm x 580 mm x 150 mm FAG 32264
Tapered roller bearings

Bearing No. 32264

| | |
|----------------|----------------|
| Size | 320x580x159 mm |
| Bore Diameter | 320 mm |
| Outer Diameter | 580 mm |
| Width | 159 mm |
| d | 320 mm |
| D | 580 mm |
| T | 159 mm |
| B | 150 mm |
| C | 125 mm |
| a | 136 mm |
| d1 | 439 mm |
| r1 min. | 6 mm |
| r2 min. | 5 mm |
| r3 min. | 5 mm |
| r5 min. | 136 mm |
| Ca min. | 16 mm |
| Cb min. | 34 mm |
| da max | 372 mm |
| Da min | 486 mm |
| Da max. | 560 mm |
| db min | 340 mm |
| Db min. | 555 mm |
| ra max. | 6 mm |
| rb max. | 6 mm |
| Weight | 170 Kg |
| | |

32264 Bearing 2D drawings and 3D CAD models



NTPT NTK BEARINGS CO.,LTD.

| | |
|-------------------------------|-------------|
| Basic dynamic load rating (C) | 3000 kN |
| Basic static load rating (C0) | 5200 kN |
| Fatigue load limit (Pu) | 490 |
| Reference speed | 530 r/min |
| Limiting speed | 1 050 r/min |
| Calculation factor (e) | 0,44 |
| Calculation factor (Y) | 1,38 |